

# HIGH PERFORMANCE 60 CELL POLYCRYSTALLINE **Optimal**

# **Premium**

## SOLAR PHOTOVOLTAIC MODULE

**CNPV-255P, CNPV-250P, CNPV-245P, CNPV-240P**

Series by **CNPV** POWER


### MOREPOWER

#### 3% Positive Tolerance

CNPV's positive tolerance on label rating power provides higher kWh for money invested.



Low iron, anti-reflective coated glass gives 2% Energy gain.



3 busbar design cells in modules ensures longevity and greater power output.



Matching gives 2% additional power gain measured at STC conditions.



Independently verified by Photon and Öko-Test as amongst the best kWh/kWp output worldwide.




EL screening provides defect free modules.



Twist resistant frame design.



Pre-approved with financial institutions and rapid capability ensures customers' cost of project is reduced.



Audited controls for high value consistency.



### FOR LONGER

#### True Linear 25 Years Warranty

Highest power warranty coverage available on a linear basis.

#### Workmanship 10 Years Warranty

10 years global workmanship warranty.

#### Strength 8000Pa

Industry leading snow loading capacity.

#### Degradation Resistance

Superior resistance to PID.

#### Accredited ammonia/salt mist resistance

Long life in marine and high pollution environments.

#### Smart Junction Box

Long term water vapour screening and increased heatsink.

#### Low Carbon Footprint

One of the lowest carbon footprints over 100 years life cycle.

#### Green Credentials

Fully committed to recycling during production and end of product life, a dedicated member of PV cycle.

#### Eco Friendly Packaging

Friendly materials choice with high density packing.

#### ISO14001 accredited ISO

Continuous improvement in reducing environmental impact.

### MUCH SAFER

### AND GREENER

#### About CNPV

CNPV Solar Power SA, is a leading integrated manufacturer of solar photovoltaic products, that designs, manufactures and supplies highly efficient and cost effective crystalline solar photovoltaic modules. Reliability & longevity are built into our world-class crystalline solar photovoltaic modules, which undergo rigorous internal tests and external certifications (IEC61215, IEC61730, UL and CE) to ensure peak performance and safety. For further information, please visit CNPV's website at <http://www.cnpv-power.com> please contact us at [marketing@cnpv-power.com](mailto:marketing@cnpv-power.com).



Electrical Data	CNPV-235P	CNPV-240P	CNPV-245P	CNPV-250P	CNPV-255P
Peak Power $W_{a-s-Pmax}$ (Wp)	235	240	245	250	255
Power Output Tolerance-Pmax (%)	0/+3	0/+3	0/+3	0/+3	0/+3
Maximum Power Voltage-Vmp(V)	28.70	29.20	29.60	30.10	30.60
Maximum Power Current-Imp (A)	8.20	8.24	8.28	8.32	8.36
Open Circuit Voltage-Voc (V)	37.20	37.40	37.60	37.80	38.00
Short Circuit Current-Isc (A)	8.75	8.78	8.82	8.86	8.90
Encapsulated Solar Cell Efficiency- $\eta_c$ (%)	16.1	16.5	16.8	17.1	17.5
Module Efficiency- $\eta_m$ (%)	14.4	14.7	15.0	15.3	15.6

Values at Standard Test Conditions STC (Air Mass AM 1.5, Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C)

Mechanical Data	
Solar Cells	Poly Crystalline 156x156mm
Cells Configuration	60 cells (6x10)
Module Dimension	1650x992x35mm (64.96"x39.06"x1.38")
Weight	18Kg(39.68lb)
Glass	High transmission tempered glass with ARC
Frame	Anodized aluminium alloy type 6063T5; color: Silver
J-box	IP65, 1000VDC, TUV&UL certified with 3 scho ky bypass diodes
Cables/Connector	4.0mm <sup>2</sup> (12AWG), TUV certified/IP67, Type IV

Temperature Ratings	
Nominal Operating Cell Temperature (NOCT)	45±2°C(113±3.6°F)
Temperature Coefficient of Pmax	- 0.40%/°C(-0.22%/°F)
Temperature Coefficient of Voc	- 0.32%/°C(-0.18%/°F)
Temperature Coefficient of Isc	0.05%/°C(0.028%/°F)

**Warranty**

10 years workmanship warranty  
 25 years world's first true linear performance warranty



(Please refer to CNPV product warranty for details)

Maximum Ratings	
Operational Temperature	-40~+85°C
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A

Packaging Configuration	
Modules per box	30 pcs
Modules per 40 high cubic container	840 pcs
Modules per 20 container	300 pcs
Dimensions of Pallet (LxWxH)	1705x1145x1174mm
Gross Weight	615kg




**I-V Characteristics at Different Irradiance & Temperature**

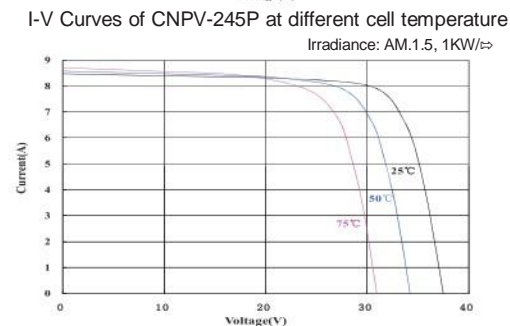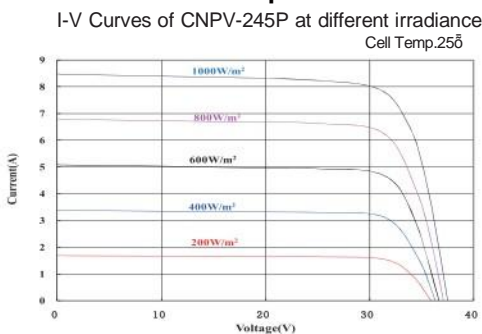

Module Efficiency Up to **15.6%**      Wattage Up to **255W**      Years Warranty **25**

**Dimensional Characteristics**

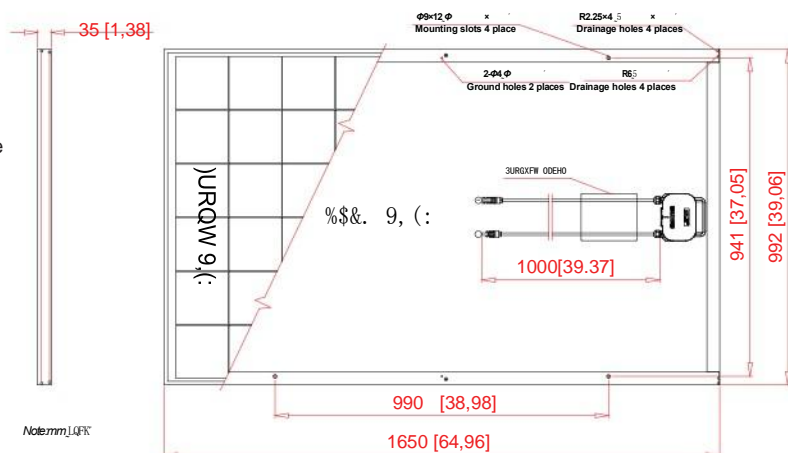

DISCLAIMER: specifications included in this datasheet are subject to change without previous notice from the company. In case of any conflicts/problems that may arise due to misinterpretation, prevailing conditions are the ones described in the original version (in English).

CNPV Solar Power SA  
 E-mail: marketing@cnpv-power.com  
 Web: www.cnpv-power.com

Our Partners: Alpha Energy  
 PO Box 13384  
 Tauranga 3110  
 New Zealand